
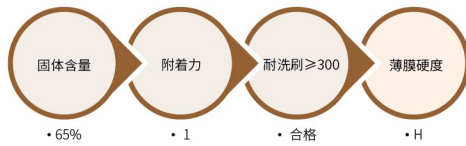


COEGARD Wallcoat EP (0.2~0.3mm)


水性环氧墙面涂层 WATER-BASED EPOXY WALLCOAT

COEGARD Wallcoat EP (0.2~0.3mm) 是双组份水性环氧墙面系统。

COEGARD Wallcoat EP (0.2~0.3mm) is a two-component water-based epoxy wall coating.

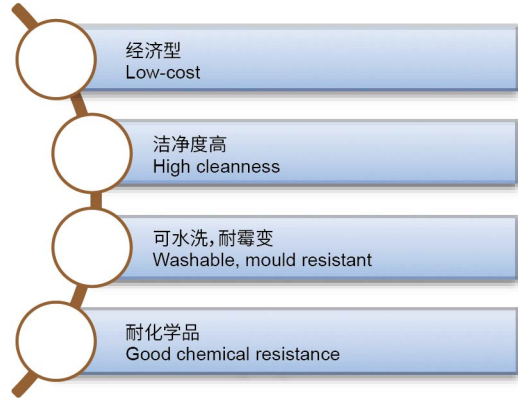

步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
1	基面 Base	处理 Preparation 机械处理, 清洁 Mechanical treatment and cleaning of base			
2	底涂 Primer	COEGARD Wallcoat EP 水性环氧墙面涂料 Water-based wallcoat	0.2 kg/m ²	滚涂 Roller	8小时后 Allow 8 hours
3	面涂 Finish	COEGARD Wallcoat EP 水性环氧墙面涂料 Water-based wallcoat	0.15-0.2 kg/m ²	滚涂 Roller	



适用场所

- 酿酒工业
- 食品及食品加工行业
- 超市
- 医院
- 制药工业
- 屠宰业, 鱼肉加工业
- 化学工业
- 行车频繁区域如汽修厂及汽车库
- 食堂
- 轻工业
- 展会、交易会
- 贮藏库

Uses

- Wine industry
- Food and food processing industry
- Supermarkets
- Hospitals
- Pharmaceutical industry
- Slaughtering industry and meat and fish processing industry
- Chemical industries
- Garages and vehicle depots subject to medium-to-heavy traffic
- Canteen kitchens
- Light engineering industry
- Exhibition and trade fair halls
- Storage depots