




COEGARD Wallcoat PU-ESD (0.1~0.2mm)

防静电水性聚氨酯墙面涂层


ELECTROSTATIC DISSIPATIVE WATER-BASED POLYURETHANE WALLCOAT

COEGARD Wallcoat PU-ESD (0.1~0.2mm) 是双组份防静电水性聚氨酯墙面系统。

COEGARD Wallcoat PU-ESD (0.1~0.2mm) is a two-component, electrostatic dissipative, water-based polyurethane wall coating.

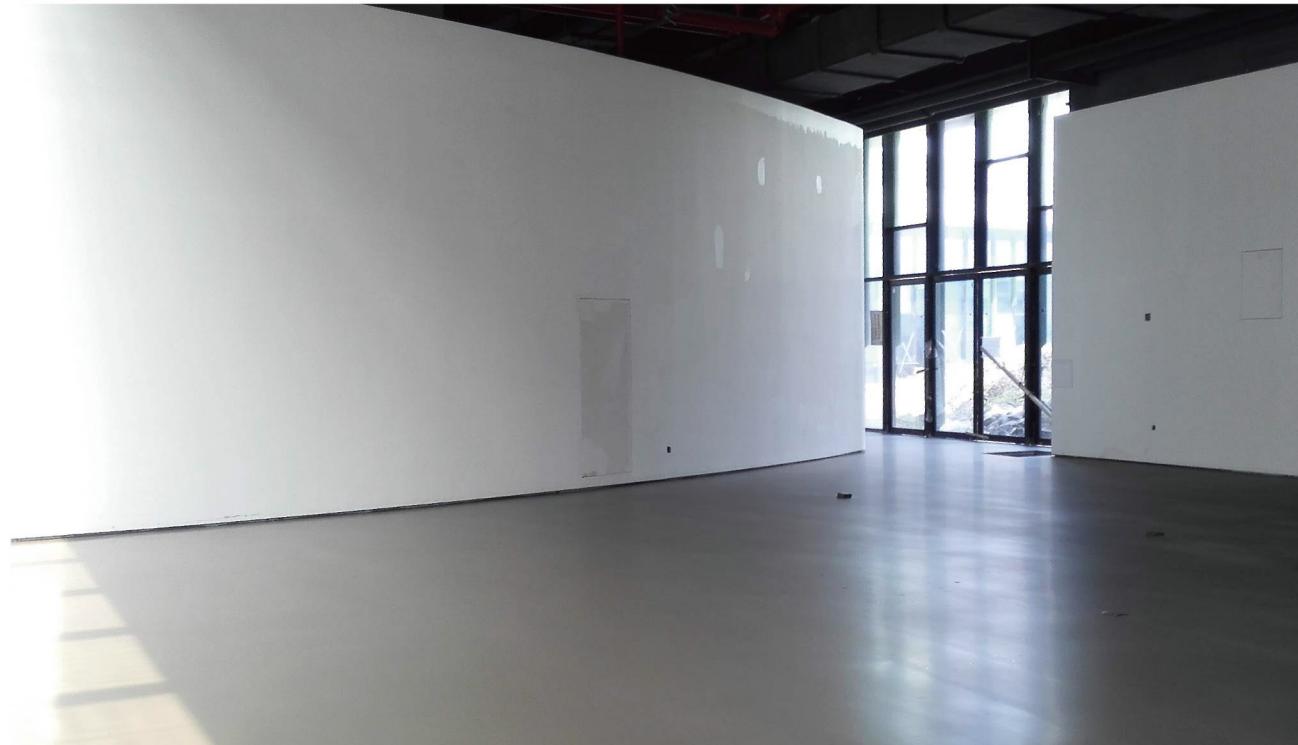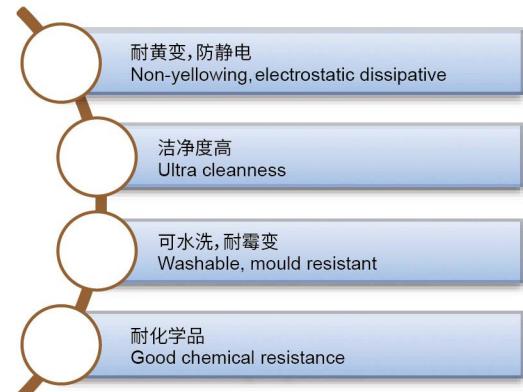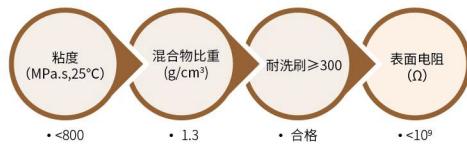

步骤 Step	产品 Product	说明 Information	理论用量	施工方法	覆涂间隔时间
			Consumption	Application method	Overcoating
1	基面 Base	处理 Preparation	机械处理, 清洁 Mechanical treatment and cleaning of base		
2	底涂 Primer	COEGARD Wallcoat PU	水性聚氨酯墙面涂料 Water-based PU wallcoat	0.2 kg/m ²	滚涂 Roller
3	面涂 Finish	COEGARD Wallcoat PU-ESD	防静电水性聚氨酯墙面涂层 Electrostatic dissipative water-based polyurethane wall coating	0.15 kg/m ²	滚涂 Roller



适用场所

- 医院、电影院
- 电子及电类工业
- 核电站
- 溶剂及燃料储存库
- 易燃易爆的厂房及仓库
- 使用电子及机器人操作的工厂
- 电子数据处理中心
- 易燃材料储存库
- 制药公司生产车间地面
- 使用电子、雷达及卫星监视设备的军工厂

Uses

- Hospital theatres
- Electronic and electro-technical industry
- Nuclear power plants
- Solvents and fuel storage facilities
- Explosives manufacturing and storage facilities
- Facilities using electronic and robotic handling systems
- Electronic data processing centres
- Flammable materials storage facilities
- Production floors in pharmaceutical companies
- Military plants using electronic, radar and satellite observation equipment