
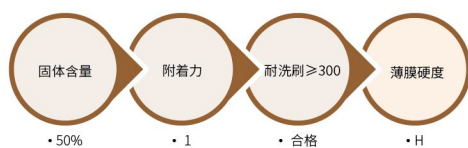


COEGARD Wallcoat PU (0.2~0.3mm)


水性聚氨酯墙面涂层 WATER-BASED POLYURETHANE WALLCOAT

COEGARD Wallcoat PU (0.2~0.3mm) 是双组份水性聚氨酯墙面系统。

COEGARD Wallcoat PU (0.2~0.3mm) is a two-component water-based polyurethane wall coating.

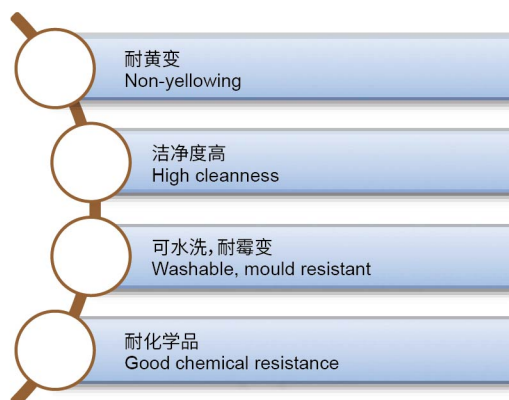

步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
1	基面 Base	处理 Preparation 机械处理, 清洁 Mechanical treatment and cleaning of base			
2	底涂 Primer	COEGARD Wallcoat PU 水性聚氨酯墙面涂料 Water-based PU wallcoat	0.2 kg/m ²	滚涂 Roller	8小时后 Allow 8 hours
3	面涂 Finish	COEGARD Wallcoat PU 水性聚氨酯墙面涂料 Water-based PU wallcoat	0.15-0.2 kg/m ²	滚涂 Roller	



适用场所

- 食品、鱼肉类产业
- 制药工业
- 饮料工业
- 冷藏工业
- 机械制造业
- 化学工业
- 医院、实验室
- 超市
- 行车频繁区域如停车库
- 贮藏库
- 停车场、桥梁、立交桥、机场

Uses

- Food, meat and fish industry
- Pharmaceutical industry
- Beverage industry
- Refrigeration industry
- Engineering industry
- Chemical industry
- Hospitals and labs
- Supermarkets
- Garages and vehicle depots subject to medium-to-heavy traffic
- Storage depots
- Car parks, bridges, flyovers, airports