
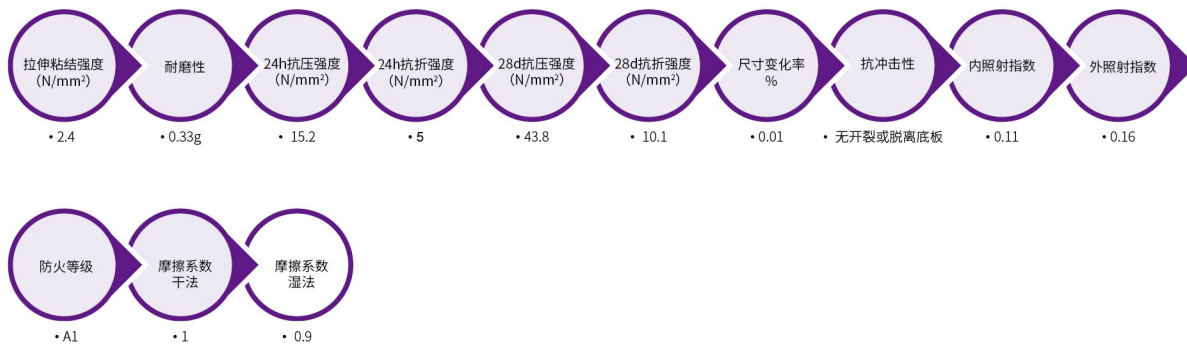


COEPLAN T520 (5~10mm)


快干水泥基自流平面层 FAST DRYING SELF-LEVELLING TOPPING

COEPLAN T520 (5~10mm) 是特殊水硬性胶凝材料制成的快干高耐磨自流平面层,具有良好的流动性,可作为新旧混凝土和瓷砖基面的找平或面层。

COEPLAN T520 (5~10mm) is the fast-drying self-levelling topping with good wear resistant. It can be used as the levelling or top coat over the new and existing concrete and tiles.

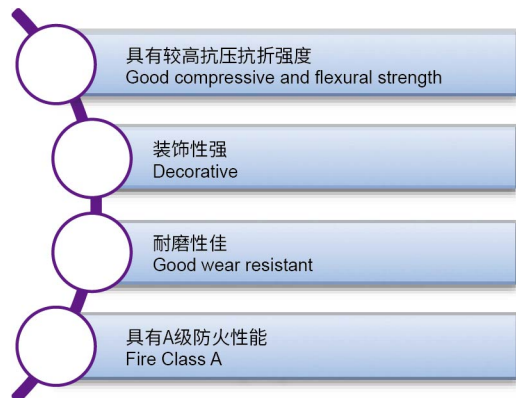

步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
1 基面 Base	处理 Preparation	机械处理, 清洁 Mechanical treatment and cleaning of base			
2 底涂 Primer	COEPOX 120	环氧底涂 Epoxy resin primer	0.3-0.5 kg/m ²	滚筒 Roller	16小时后 Allow 16 hours
3 散播 Broadcast	石英砂 QUARTZ 0.6-0.9	在刚施工好的底涂上满抛石英砂 Broadcast of quartz on freshly-applied primer	3.0-4.0 kg/m ²	用手播撒 Scatter by hand	
4 自流平 Self-levelling	COEPLAN T520	水泥基自流平 Cement self-levelling	1.6 kg/m ² /mm	泵送 pump supply	8小时后 Allow 8 hours
5 罩面 Topcoat	COEHARD C301 COEPUR W700 COEHARD C312	自然效果 Natural effect 自然效果 Natural effect 抛光效果 Polished effect		滚涂/喷涂抛光 Roller/spray &polish	



适用场所

- 工业厂房
- 超市
- 购物中心
- 专卖店
- 停车场
- 餐厅
- 展厅

Uses

- Industrial plants
- Supermarkets
- Shopping center
- Exclusive shop
- Parking area
- Restaurant
- Showroom

