
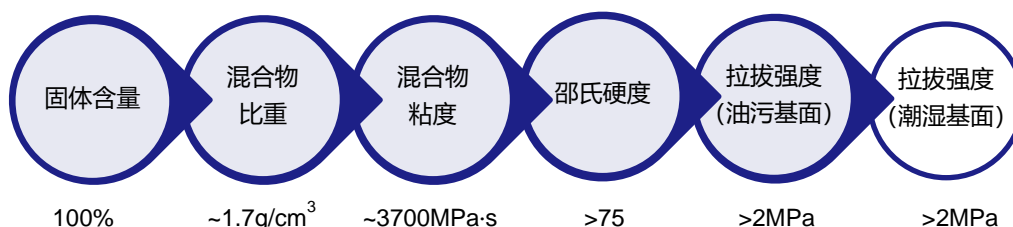


COEPOX 122


抗油防潮环氧底涂 EPOXY PRIMER WITH OIL AND MOISTURE RESISTANCE

COEPOX 122 是双组份无溶剂环氧树脂涂料，可用于潮湿或油污污染的混凝土基面。环保无溶剂，具有良好的渗透性以及卓越的机械性能，用途广泛。

COEPOX 122 is a two-component, solvent-free epoxy primer for damp or oil-contaminated substrate. COEPOX 122 is environmental-friendly and solvent-free with good penetration, excellent mechanical properties and wide range of uses.

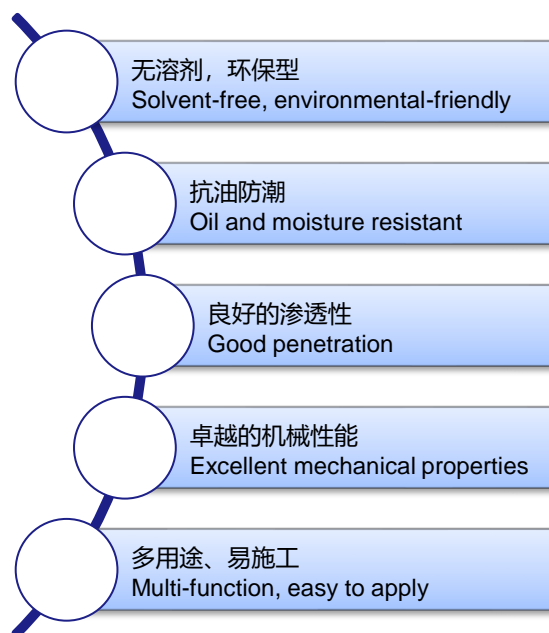

步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
1	基面 Substrate	处理 Preparation	机械处理, 清洁 Mechanical treatment and cleaning of substrate		
2	底涂 Primer	COEPOX 122	抗油防潮环氧底涂 Epoxy primer with oil and moisture resistance	滚涂/刮涂 Roller/Scraper	24小时 Allow 24 hours
3	撒播 Broadcast	石英砂 QUARTZ 0.6~1.2	在刚施工好的底涂上播撒少量石英砂 Broadcast of quartz on freshly-applied primer	用手撒播 Scatter by hand	
4	后续涂层 Next coats	COELAN Products	COELAN推荐的地坪系统 Flooring systems recommend by COELAN		

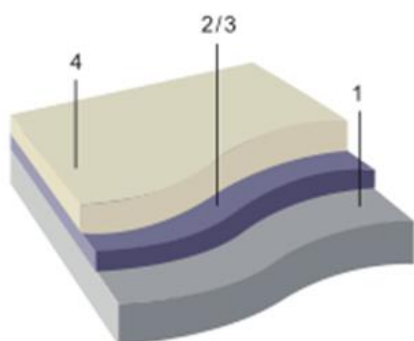

适用场景

- 作为密封剂, 封闭多孔隙的、被油污污染的混凝土基面
- 作为密封剂, 封闭多孔隙的潮湿混凝土基面
- 作为普通环氧或聚氨酯材料的黏结剂
- 破损地面的修补及找平

Uses

- As sealant to seal porous, oil-contaminated concrete substrate
- As sealant to seal porous, damp concrete substrate
- As bonding agent for epoxy or polyurethane materials
- Repairing and levelling of the damaged floors