
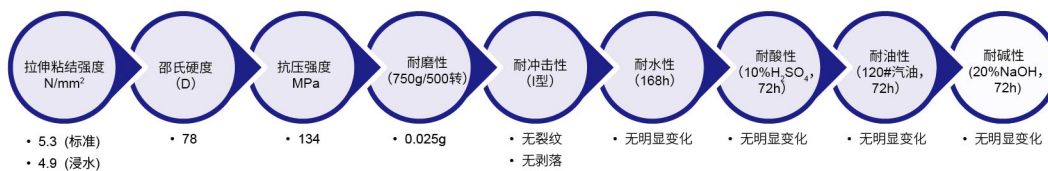


COEPOX 200 (1~3mm)


自流平系统 SELF-LEVELLING SYSTEM

COEPOX 200 (1~3mm) 是双组分无溶剂环氧自流平系统,是工业/商业项目地面(包括磨损地面)的理想选择,耐化学品性/物理性能佳,表面平整美观。2~3mm厚的涂膜,施工快捷,创造出无缝的,防水的,平整光滑的,彩色的,密实的,抗油污的,耐化学品的,耐磨损耐冲击的地面,可以每天冲洗。

COEPOX 200 (1~3mm) is a two-component self-levelling solvent-free epoxy-amine system that is ideal to coat industrial/commercial floors (including worn floors) that require high chemical/physical resistance, remarkable flatness and a pleasant appearance. Just 2~3mm thick and requiring only a few days work, this system allows to create an uninterrupted, waterproof, flat, smooth, coloured, compact, non-absorbent, anti-dust/anti-oil flooring that is resistant to chemical aggression, wear and compression and can be washed and cleaned daily.

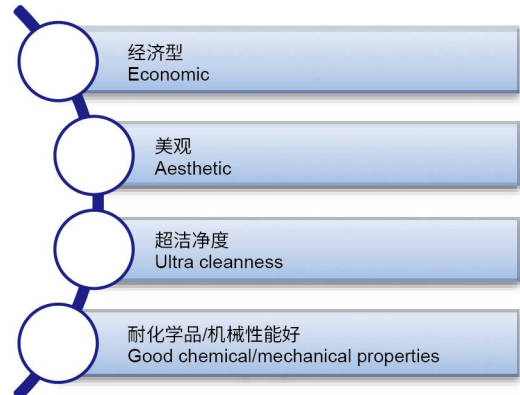

步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
1 基面 Base	处理 Preparation	机械处理, 吸尘 Mechanical treatment and vacuum clean			
2 底涂 Primer	COEPOX 111/120	无溶剂环氧底涂 Solvent-free epoxy resin primer	0.3 kg/m ²	滚涂 Roller	16小时后 Allow 16 hours
3 撒播 Broadcast	石英砂 QUARTZ 0.1-0.5	在刚施工好的底涂上播撒石英砂 Broadcast quartz on freshly-applied primer	0.5 kg/m ²	用手播撒 Scatter by hand	
4 自流平 Self-levelling finish	COEPOX 200	无溶剂环氧自流平面涂 Self-levelling solvent-free epoxy resin coating	1.2-3.0 kg/m ²	镬涂 Trowel	



适用场所

- 酿酒工业
- 食品及食品加工行业
- 超市
- 医院
- 制药工业
- 屠宰业, 鱼肉加工业
- 化学工业
- 行车频繁区域如汽修厂及汽车库
- 食堂
- 轻工业
- 展会、交易会
- 贮藏库

Uses

- Wine industry
- Food and food processing industry
- Supermarkets
- Hospitals
- Pharmaceutical industry
- Slaughtering industry and meat and fish processing industry
- Chemical industries
- Garages and vehicle depots subject to medium-to-heavy traffic
- Canteen kitchens
- Light engineering industry
- Exhibition and trade fair halls
- Storage depots