



# COEPOX 228 ESD (1.5~3mm)

高防腐防静电自流平系统


HIGH CHEMICAL RESISTANT ELECTROSTATIC DISSIPATIVE SELF-LEVELLING SYSTEM

COEPOX 228 ESD (1.5~3mm) 是双组份高度耐腐蚀防静电环氧自流平系统，具有超强的耐化学腐蚀性能和抗机械磨损性能，容易清理，涂膜薄且完全防水。

COEPOX 228 ESD (1.5~3mm) is a two-component, solvent-free, electrostatic dissipative, self-levelling epoxy system. This system also ensures high chemical and mechanical resistance, easy cleaning, low thickness and total waterproofness..

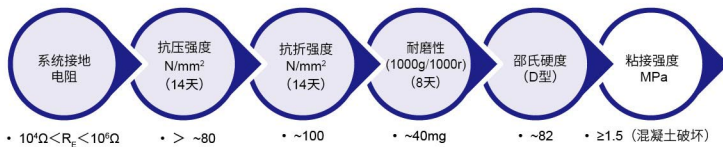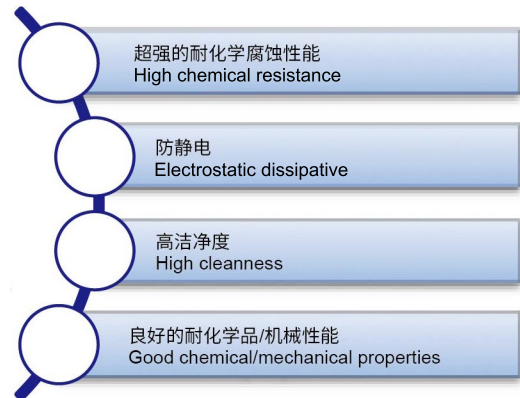

步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
1	基面 Base	处理 Preparation 机械处理, 清洁 Mechanical treatment and cleaning of base			
2	底涂 Primer COEPOX 111 (石英砂 QUARTZ 0.25)	环氧底涂 Epoxy resin primer	0.3-0.8 kg/m <sup>2</sup>	滚涂 Roller	16小时后 Allow 16 hours
3	导电地网 Conductive grid 导电铜箔 COPPER TAPES	铺设自粘型导电铜箔, 与接地端子连接 Laying of self-adhesive copper tape grid connected to an earthing point			
4	导电底涂 Conductive primer COEPOX W130	水性环氧导电底涂 Water-based epoxy conductive primer	0.1 kg/m <sup>2</sup>	滚涂 Roller	16小时后 Allow 16 hours
5	自流平 Self-levelling finish COEPOX 228 ESD	高防腐防静电环氧自流平涂料 High chemical-resistant electrostatic dissipative epoxy self-levelling coating	1.2-1.8 kg/m <sup>2</sup>	镟涂 Trowel	

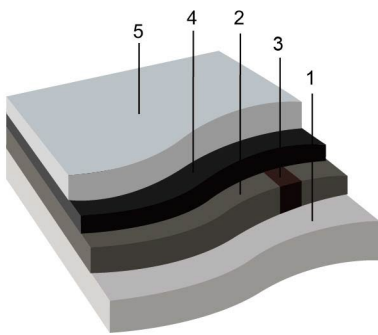

适用场所

- 医院、电影院
- 电子及电类工业
- 核电站
- 溶剂及燃料储存库
- 易燃易爆的厂房及仓库
- 使用电子及机器人操作的工厂
- 电子数据处理中心
- 易燃材料储存库
- 制药公司生产车间地面
- 使用电子、雷达及卫星监视设备的军工厂

Uses

- Hospital theatres
- Electronic and electro-technical industry
- Nuclear power plants
- Solvents and fuel storage facilities
- Explosives manufacturing and storage facilities
- Facilities using electronic and robotic handling systems
- Electronic data processing centres
- Flammable materials storage facilities
- Production floors in pharmaceutical companies
- Military plants using electronic, radar and satellite observation equipment