
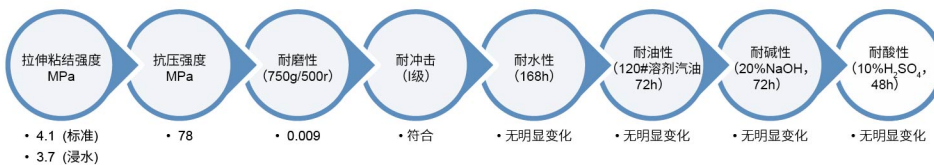


COEPUR 750 (1.5~3mm)


自流平系统 SELF-LEVELLING SYSTEM

COEPUR 750 (1.5~3mm) 是双组份无溶剂低弹性聚氨酯自流平系统, 低粘度, 能遮盖细微裂纹, 耐磨性及抗冲击性能佳, 适用于用作生产或储存等的工业厂房地面。具有一定的抗重压性及耐化学品性能, 适用于潮湿环境 (饮食行业等), 停车场及装载台等。也适用于多层停车场及车库的室内及室外地面。

COEPUR 750 (1.5~3mm) is a two part, solvent free, low-flexibility PUR resin self-levelling flooring system with crack-bridging capability, with low viscosity, good wear resistance and impact resistance. Smooth wearing course with crack-bridging properties for industrial floors in production and storage facilities, work shops etc. Can be subjected to normal to medium heavy mechanical and chemical stress. Broadcast wearing course with crack-bridging properties for wet working areas (food and beverage industry etc.), car park decks and loading ramps etc. Suitable for internal and external applications on floors in multi-storey car-park and garages.

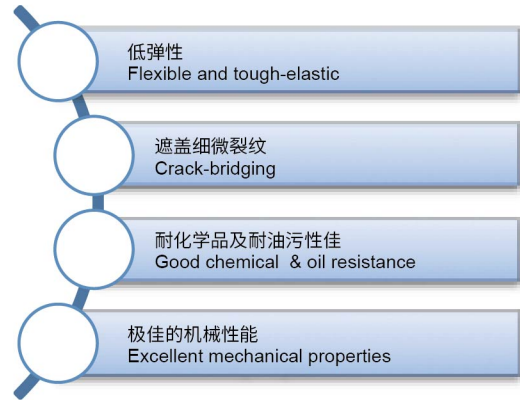

步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
1 基面 Base	处理 Preparation	机械处理, 清洁 Mechanical treatment and cleaning of base			
2 底涂 Primer	COEPOX 111/120	环氧底涂 Epoxy resin primer	0.3-0.5 kg/m ²	滚涂 Roller	16小时后 Allow 16 hours
3 撒播 Broadcast	石英砂 QUARTZ 0.3-0.7	在刚施工好的底涂上播撒少量石英砂 Sparse broadcast of quartz on freshly-applied primer	1.5 kg/m ²	用手播撒 Scatter by hand	
4 自流平 Self-levelling finish	COEPUR 750	无溶剂聚氨酯自流平 Self-levelling solvent-free polyurethane resin coating	1.5-3.0 kg/m ²	镘涂 Trowel	16小时后 Allow 16 hours
5 罩面 Topcoat	COEPUR S705 /W700	高耐磨聚氨酯罩面 High abrasion resistance PU topcoat	0.1 kg/m ²	滚涂 Roller	

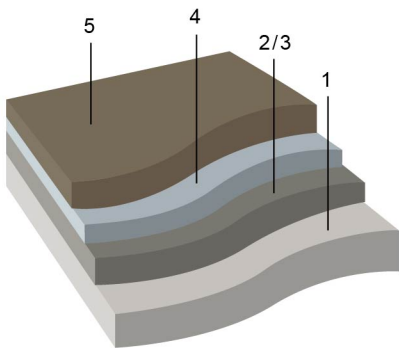

适用场所

- 食品、鱼肉类产业
- 制药工业
- 饮料工业
- 冷藏工业
- 机械制造业
- 化学工业
- 医院、实验室
- 超市
- 行车频繁区域如停车库
- 贮藏库
- 停车场、桥梁、立交桥、机场

Uses

- Food, meat and fish industry
- Pharmaceutical industry
- Beverage industry
- Refrigeration industry
- Engineering industry
- Chemical industry
- Hospitals and labs
- Supermarkets
- Garages and vehicle depots subject to medium-to-heavy traffic
- Storage depots
- Car parks, bridges, flyovers, airports