
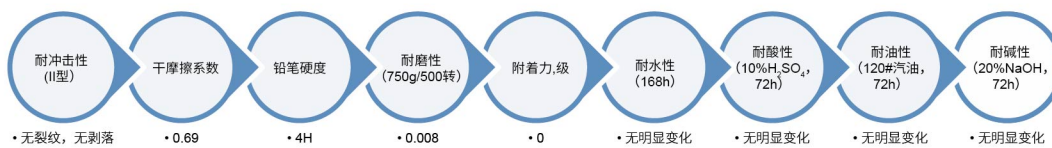


COEPUR S705 (0.1mm)


高耐磨罩面 HIGH ABRASION RESISTANCE SEALER

COEPUR S705 (0.1mm) 是三组份高固含脂肪族聚氨酯地坪罩面, 具有极佳的耐磨及耐化学品性能。该产品适用于交通频繁区域, 如卡车装货区、仓库及车辆频繁行驶的通道。可作为COELAN环氧及聚氨酯地坪系统的罩面层。

COEPUR S705 (0.1mm) is a three-component high solids, aliphatic polyurethane flooring coating, have very good abrasion and chemical resistance performance. COEPUR S705 is formulated for use in very high traffic areas such as truck loading docks, warehouses and high traffic aisle ways. Seal coat for COELAN epoxy floors and polyurethane floors.

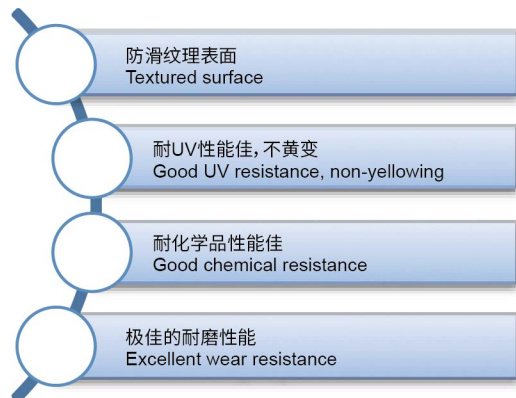

步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
1	基面 Base	处理 Preparation	机械处理, 清洁 Mechanical treatment and cleaning of base		
2	底涂 Primer	COEPOX 111/120	环氧底涂 Epoxy resin primer	滚涂 Roller	16小时后 Allow 16 hours
3	撒播 Broadcast 撒播	石英砂 QUARTZ 0.3-0.7	在刚施工好的底涂上播撒少量石英砂 Sparse broadcast of quartz on freshly-applied primer	用手播撒 Scatter by hand	
4	自流平 Self-levelling finish	COEPUR 750/ COEPOX 200	无溶剂聚氨酯/环氧自流平 Self-levelling solvent-free polyurethane /epoxy resin coating	镘涂 Trowel	16小时后 Allow 16 hours
5	罩面 Topcoat	COEPUR S705 (透明或带颜色)	高耐磨聚氨酯罩面 High abrasion resistance PU topcoat	滚涂 Roller	

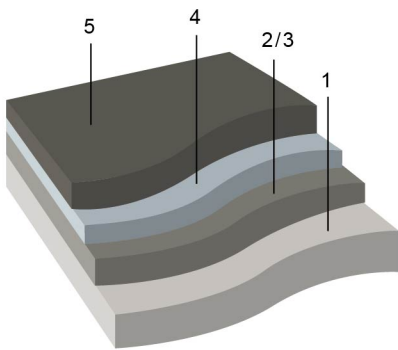

适用场所

- 食品、鱼肉类产业
- 制药工业
- 饮料工业
- 冷藏工业
- 机械制造业
- 化学工业
- 医院、实验室
- 超市
- 行车频繁区域如停车库
- 贮藏库
- 停车场、桥梁、立交桥、机场

Uses

- Food, meat and fish industry
- Pharmaceutical industry
- Beverage industry
- Refrigeration industry
- Engineering industry
- Chemical industry
- Hospitals and labs
- Supermarkets
- Garages and vehicle depots
subject to medium-to-heavy traffic
- Storage depots
- Car parks, bridges, flyovers, airports