
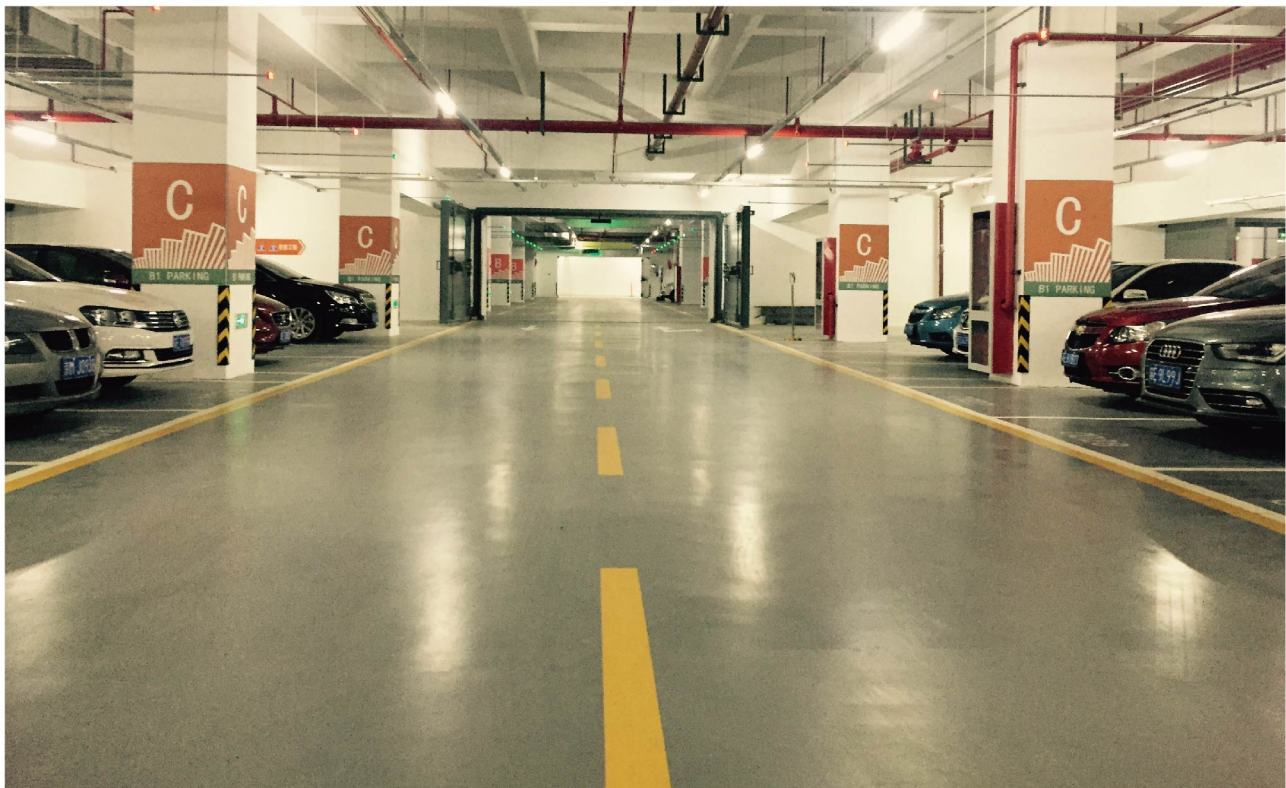
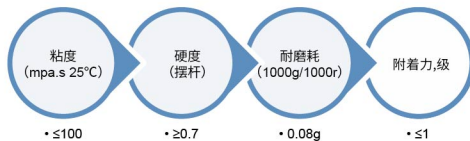


# COEPUR Thixo (0.3~0.5mm)


## 薄涂系统 MULTI-LAYER SYSTEM

COEPUR Thixo (0.3~0.5mm) 是双组份高固含聚氨酯系统,可调色。由于黏度低,可施工成光滑表面或纹理表面,也可作为砂浆系统或撒播系统罩面。可以在-20°C ~ +70°C温度下使用。

COEPUR Thixo (0.3~0.5mm) is a two-component high solids, colored sealant based on polyurethane. Due to its low viscosity, self-smoothing coatings as well as textured coatings, and seal coats mortar screeds and broadcast screeds can be produced. It can be used under the temperature range of -20°C~+70°C.

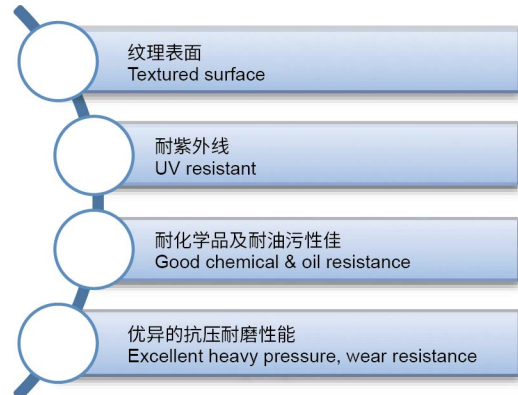

| 步骤<br>Step                         | 产品<br>Product     | 说明<br>Information                                     | 理论用量<br>Consumption       | 施工方法<br>Application method | 覆涂间隔时间<br>Overcoating   |
|------------------------------------|-------------------|---|---------------------------|----------------------------|-------------------------|
| 1<br>基底<br>Base                    | 处理<br>Preparation | 机械处理, 清洁<br>Mechanical treatment and cleaning of base |                           |                            |                         |
| 2<br>底涂<br>Primer                  | COEPOX 111/120    | 环氧底涂<br>Epoxy resin primer                            | 0.3-0.5 kg/m <sup>2</sup> | 滚涂<br>Roller               | 16小时后<br>Allow 16 hours |
| 3<br>薄涂面层<br>Multi-layer<br>finish | COEPUR Thixo      | 聚氨酯薄涂<br>Polyurethane resin coating                   | 0.1-0.3 kg/m <sup>2</sup> | 滚涂<br>Roller               |                         |

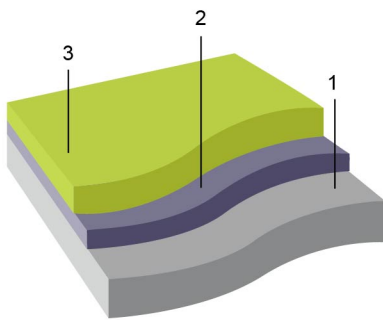

## 适用场所

- 食品、鱼肉类产业
- 制药工业
- 饮料工业
- 冷藏工业
- 机械制造业
- 化学工业
- 医院、实验室
- 超市
- 行车频繁区域如停车库
- 贮藏库
- 停车场、桥梁、立交桥、机场

## Uses

- Food, meat and fish industry
- Pharmaceutical industry
- Beverage industry
- Refrigeration industry
- Engineering industry
- Chemical industry
- Hospitals and labs
- Supermarkets
- Garages and vehicle depots subject to medium-to-heavy traffic
- Storage depots
- Car parks, bridges, flyovers, airports