



# METACRYL AV (2~4mm)


## 自流平系统 SELF-LEVELLING SYSTEM

METACRYL AV (2~4mm) 是PMMA系统，与METACRYL QUARZO AV石英砂骨料配套使用，可以施工成自流平地面（4mm厚），快速干燥，性能优异且装饰性强。该产品几乎适用于所有类型的制造厂、商业及/或小型生产工厂。METACRYL AV可以在低温下施工，几小时即可干燥，涂膜具有柔性，卫生，防水，耐化学品/物理抗性优异，耐久性极佳。

METACRYL AV (2~4mm) is a PMMA system designed to be used in combination with size-graded quartz aggregate METACRYL QUARZO AV, to provide a self-levelling resin floor (4mm) that dries extremely quickly and ensures very high performances, including in terms of aesthetics. It is ideal for almost all types of manufacturing, commercial and/or small-scale production facilities. With METACRYL AV, low temperatures will not be a problem, shutdown time will be limited to just a few hours and the excellent performances in terms of flexibility, hygiene, waterproofness and chemical/physical resistance will make for a long-lasting floor.

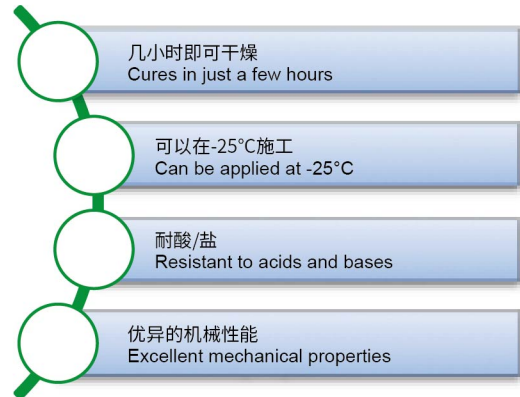

步骤 Step	产品 Product	说明 Information	理论用量 Consumption	施工方法 Application method	覆涂间隔时间 Overcoating
1	基面 Base	处理 Preparation			
2	底涂 Primer	METACRYL PRIMER	0.5 kg/m <sup>2</sup>	滚涂 Roller	2小时后 Allow 2 hours
3	撒播 Broadcast	石英砂 QUARTZ 0.3-0.7	1.5 kg/m <sup>2</sup>	用手播撒 Scatter by hand	
4	自流平 Self-levelling system	METACRYL BINDER + METACRYL QUARTZ AV in a 1:2,3 ratio	4.0 kg/m <sup>2</sup>	镟涂/刮涂 Trowel/ spreader	2小时后 Allow 2 hours
5	撒播 Broadcast	石英砂QUARTZ (天然色或彩色) 0.3-0.7	3.0 kg/m <sup>2</sup>	用手播撒 Scatter by hand	
6	面涂 Finish	METACRYLAV (透明或带颜色)	0.8 kg/m <sup>2</sup>	滚涂 Roller	

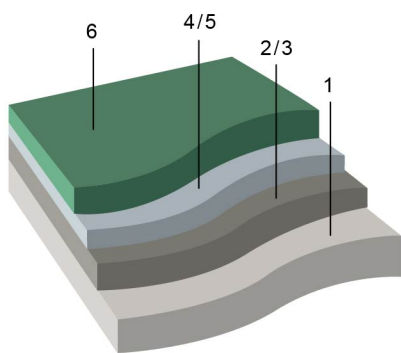

适用场所

- 食品、鱼肉类产业
- 制药工业
- 饮料工业
- 冷藏工业
- 机械制造业
- 化学工业
- 医院、实验室
- 超市
- 行车频繁区域如停车库
- 贮藏库
- 停车场、桥梁、立交桥、机场

Uses

- Food, meat and fish industry
- Pharmaceutical industry
- Beverage industry
- Refrigeration industry
- Engineering industry
- Chemical industry
- Hospitals and labs
- Supermarkets
- Garages and vehicle depots subject to medium-to-heavy traffic
- Storage depots
- Car parks, bridges, flyovers, airports